

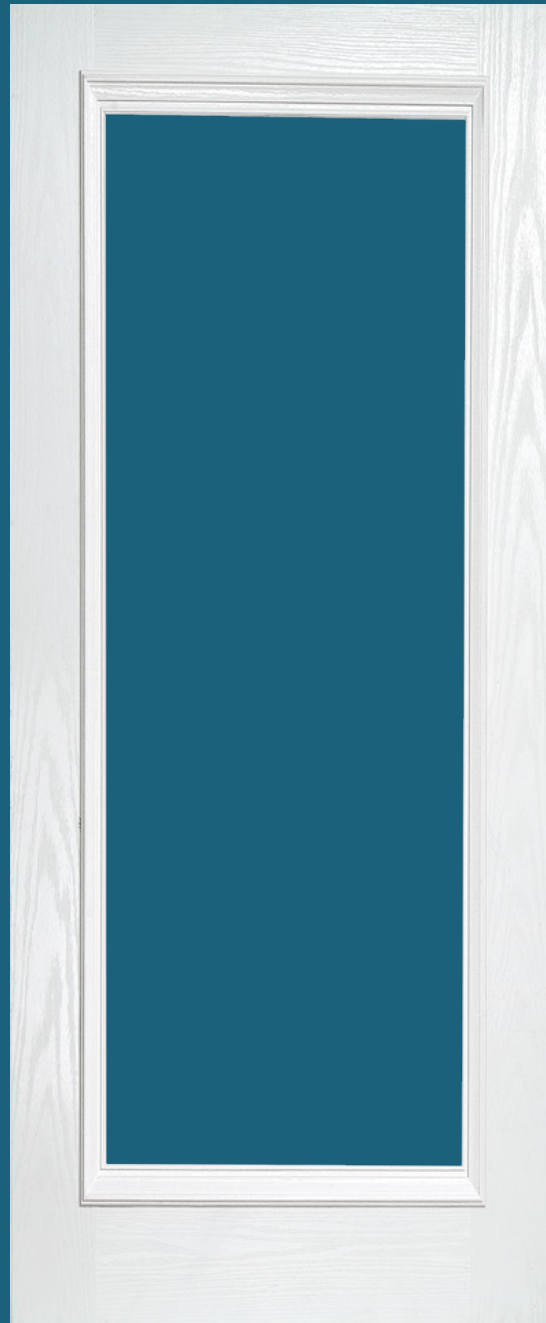



Onelite



Manufactured from Thermoset GRP (Glass Reinforced Polyester), the doors are compression moulded to give a high-definition panel design with the character of timber. The stiles and rails are composed of water-resistant polymer which is bonded to the skin and filled with an insulating core of 100% CFC-free polyurethane.



**DISTINCTION
STANDARD
COLOURS:**




**DISTINCTION
BESPOKE
COLOURS:**



DOOR SPECIFICATIONS:

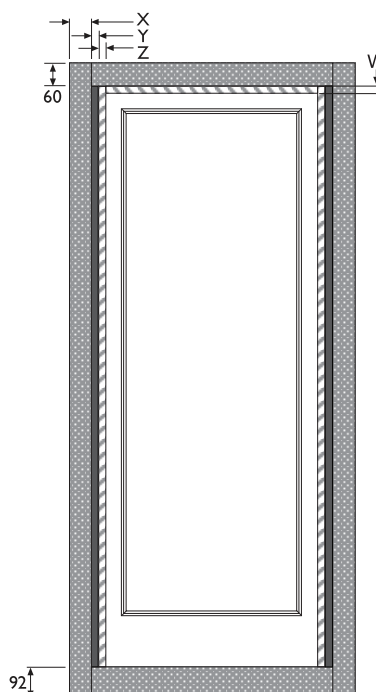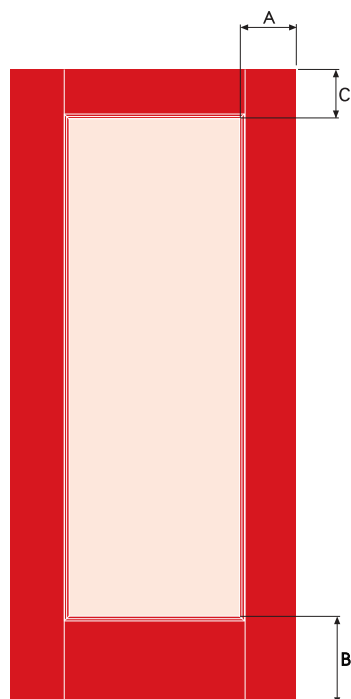

- Water Resistant Composites
- Reinforcement Wood
- LVL Wood

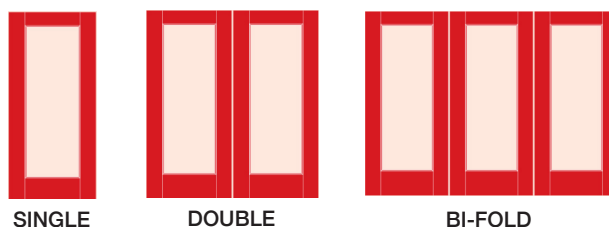

*Buff/Buff & Buff/White - are available should customers choose to have them finished themselves.

Structural Dimensions								Trimmability			24mm D/G Units
Blank Size	A	B	C	W	X	Y	Z	Top	Sides (each)	Bottom	Glass
762 x 2013mm	123.6mm	215.9mm	122.2mm	25mm	60mm	20mm	-	40mm	40mm	70mm	542x1702mm
838 x 2013mm	152.4mm	281mm	131.8mm	30mm	60mm	20mm	20mm	40mm	40mm	70mm	558x1626mm
890 x 2013mm	123.6mm	215.9mm	122.2mm	25mm	60mm	20mm	-	40mm	40mm	70mm	692x1702mm

Note: see 'One Lite' recommended glazing guide. Glazing system has been indicatively tested to satisfy the glazed infill elements of PAS23/24.



Distinction Doors Ltd,
Wentworth 36, Wentworth Industrial Estate, Wentworth Way, Tankersley, Barnsley, South Yorkshire, S75 3DH
T: 0345 2000 816 | F: 0345 2000 813 | E: sales@distinctiondoors.co.uk | W: www.distinctiondoors.co.uk
E & OE Distinction Doors reserves the right to change or withdraw any product(s) within this datasheet, without notice.