



## Touch Up Kit instructions and data


### Distinction GRP Paint Instructions and Data

The Distinction GRP Paint in this kit is the actual paint we use in our factory to paint our doors. We have packaged this into small bottles to create a professional trade only touch up kit. The shelf life is limited to 3 months from issue, as the hardener will deteriorate and may not activate the paint after an extended period in storage.

This kit is intended for use on small surface imperfections. Not suitable for large repairs.

## FOR PROFESSIONAL USE ONLY

### Contents;

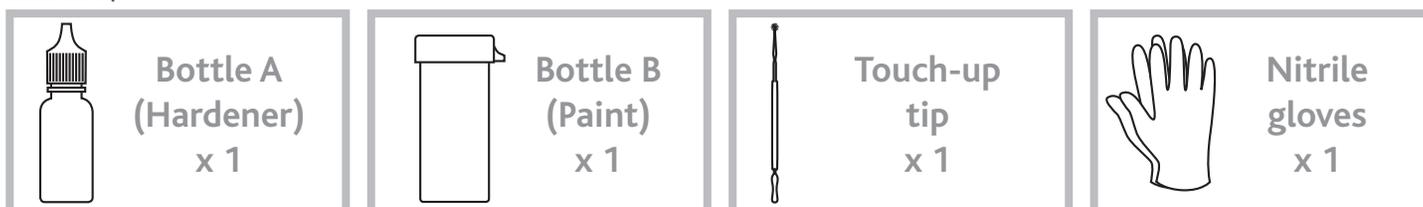

### Application;

1. Ensure the repair area is free of dust, grease and other contaminants.
2. The area you are working in must be well ventilated and you should have all kit components to hand.
3. Wearing the nitrile gloves pour contents of bottle A (hardener) into the larger bottle B (paint) and fix lid securely.
4. Shake vigorously for 1 minute to ensure components are thoroughly mixed together.
5. Using the touch-up tip provided, lightly dab the paint to the selected area.
6. Dispose of all materials according to waste disposal advice outlined below.

### Drying Times;

Air drying at 20°C Dust-free: 30min.

Handling: 4-6 hours.

Through-drying: 7 days.

### Please note;

Not suitable for spray application. Pot life once paint and hardener are mixed = 6 hours at 20 °C

### Observations

The gloss level obtainable with Distinction GRP paint is approximately 45 Gloss.

### Waste Disposal Advice

For safe disposal as normal trade waste, add the hardener to the paint, shake vigorously to activate, then allow contents to through cure. Once hard dispose of as trade waste, otherwise refer to the material safety data sheet.

For material safety data sheets please visit the web address below;  
[www.distinctiondoors.co.uk/touch-up-kit](http://www.distinctiondoors.co.uk/touch-up-kit)