



FD30 Retail Cottage




RR01-FD30 Retail
Cottage

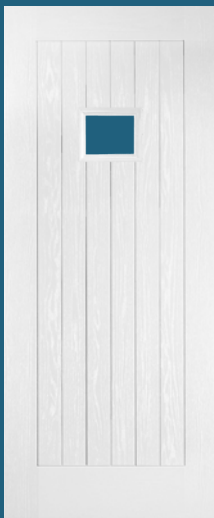

RR04-FD30
Rustic Renown Top

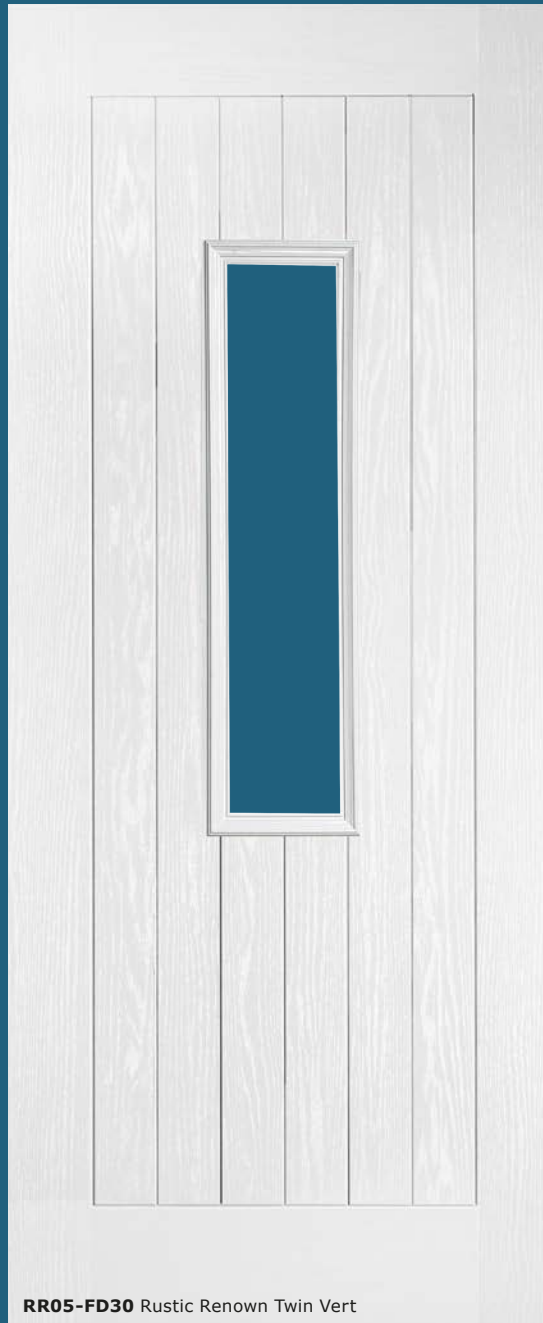

RR05-FD30 Rustic Renown Twin Vert

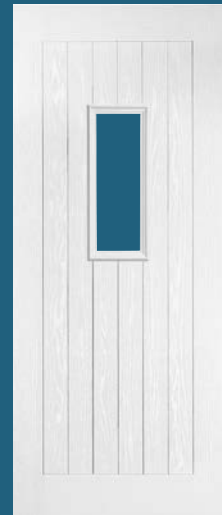


RR06-FD30 Rustic
Renown Low

Manufactured from Thermoset GRP (Glass Reinforced Polyester), the doors are compression moulded to give a high-definition panel design with the character of timber. The stiles and rails are hardwood lamels of mixed species which are bonded to the skin and filled with a fire-retardant phenolic foam.




**DISTINCTION
STANDARD
COLOURS:**



**DISTINCTION
BESPOKE
COLOURS:**



DOOR SPECIFICATIONS:

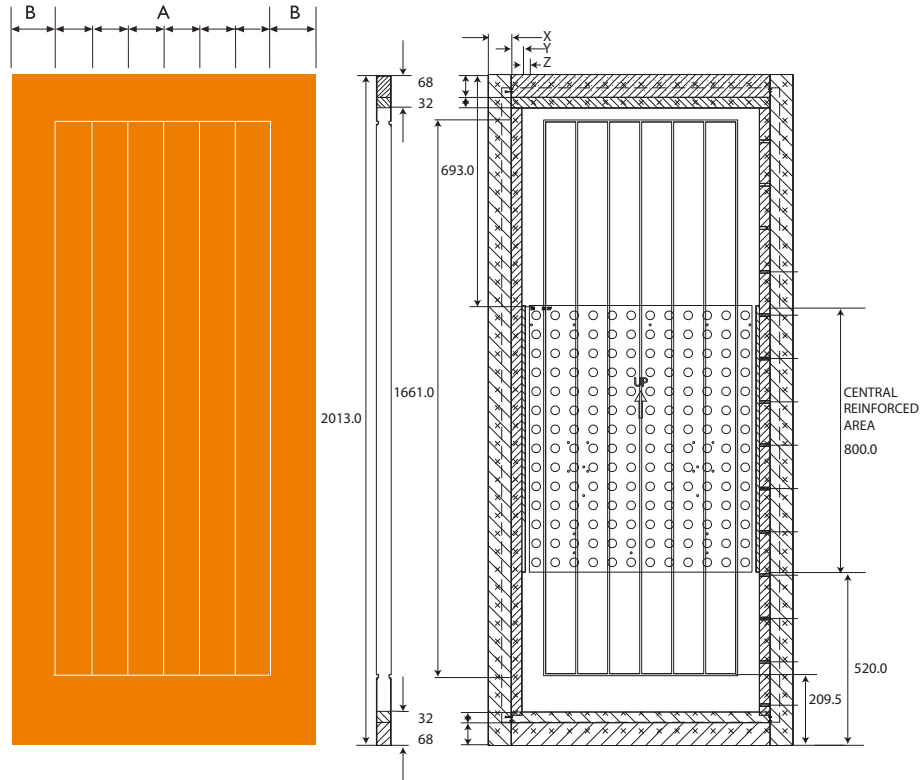

Structural Dimensions						Trimmability			
Blank Size	A	B	X	Y	Z	Top	Sides (each)	Bottom	
762 x 2013mm	96mm	93mm	48mm	32mm	10mm	40mm	20mm	70mm	
838 x 2013mm	96mm	131mm	68mm	32mm	10mm	40mm	40mm	70mm	
914 x 2013mm	96mm	169mm	68mm	32mm	10mm	40mm	40mm	70mm	

PLEASE NOTE:

- All exposed timber edges must be treated with either paint or a clear sealant for protection purposes
- Always refer to relevant "Door Blank and Cassette Performance Specification documents" to ensure compliance.
- All flat/ apartment entrance fire doors should be fitted with a self-closing device, as per Building Regulations Approved Document B (Fire Safety) Volume 2 Appendix B
- Surface mounted, overhead, rack and pinion type closers are recommended on all Nan Ya Fire Doors, as tested
- Concealed, self-closing devices are not recommended. However, should they be used for any reason, then:
 - Test evidence/ assessment must be provided
 - Adequate protective treatment must be applied to the surfaces of the closer to prevent corrosion from the phenolic foam
 - Nan Ya and/or Distinction Doors will not be held liable for any performance related issues with concealed self-closing devices
- All hardware and fittings that may come in contact with phenolic foam must have adequate surface protection against corrosion, in addition to intumescent protection
- Always refer to Distinction Doors Glazing Guides when offering glazed door options.

TYPICAL CASSETTE CONFIGURATIONS:

